




**sobr
safe™**

and

TraTek



SOBRcheck™: Stationary Alcohol Screening Device

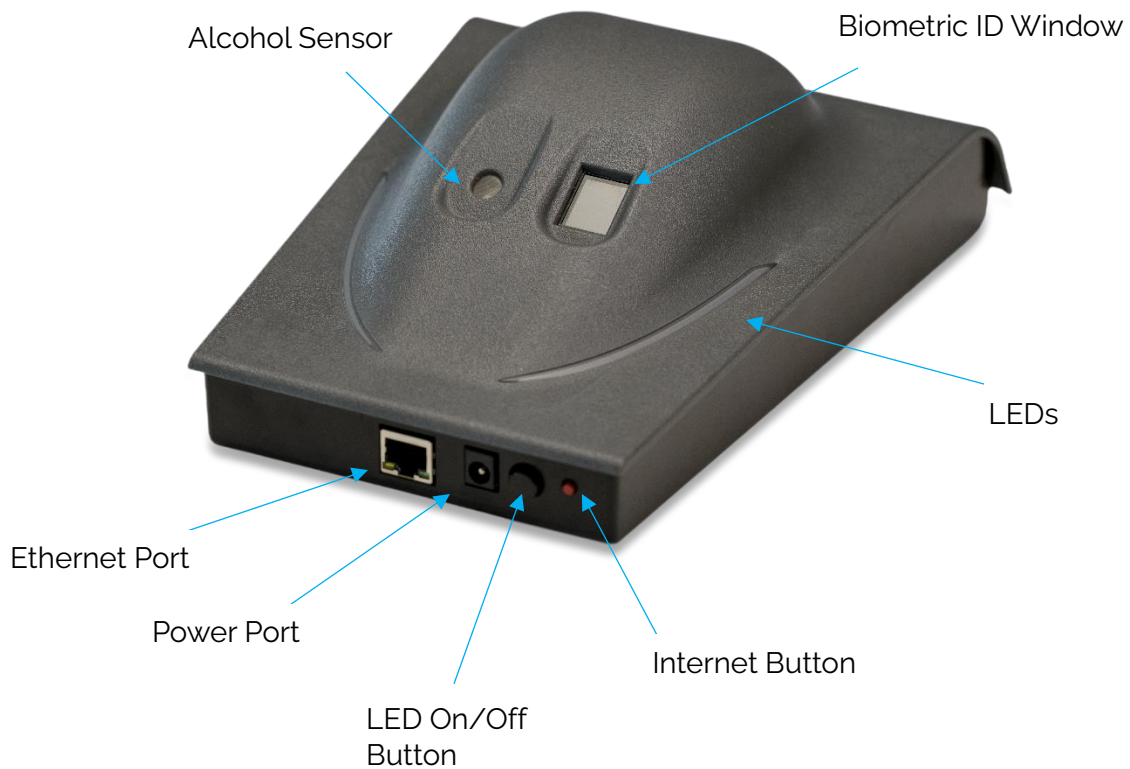

Name	Description
Alcohol Sensor	Electrochemical gas sensor that detects parts per million of ethanol.
Biometric ID Window	Biometric reader from global access control leader HID.
LEDs	Visual indicator that provides test results and network connection information.
Ethernet Port	Standard Ethernet port for network connection.
Power Port	Standard 120-volt.
LED On/Off Button	Visual indicators can be disabled per customer preference.
Internet Button	Pressing in for ten seconds initiates WiFi connection process. Pressing in for fewer than ten seconds displays device connection status.
WiFi Connection	2.4GHz WiFi required.
SOBRsafe Portal	Access user enrollment, management notifications and test results at https://sobrsafeportal.sobrsafe.com .

TraTek Monitoring Services
604-820-9691 or 888-850-9691
info@tratek.ca